

A truely new and unique range of Hickory Flooring. Hardened by Nature.







TODMAN 1900 x 190 x 12mm UV Lacquer | Wire Brushed | Matte Finish

What is **Hickory Impressions Flooring?**

Hickory is a type of tree, comprising the genus CARYA, the genus includes 17-19 species, as many as 12 are native to the USA and North America. Hickory Impressions originates from Appalachian Mountains, which is between the State of Kentucky and Virginia on the United States East Coast.

Hickory timber has had a very long and unique history. It's been reserved for the manufacture of furniture, baseball bats, bows, golf club shafts and drumsticks due to its hardness, density and resistance.

In today's increasing love of hardwood flooring, Hickory Impressions was created for its beautiful texture and hardness. All the features that make this timber so good in other products also makes Hickory Impressions the right choice for many home owners.



Appalachian Mountains, USA



Features of **Hickory Impressions Classique**

Hickory Impressions Classique is hardened by nature and will withstand the rigours of today's busy lifestyles.

With similar texture as European Oak and unique colours, plus high stability and durability, Hickory Impressions Classique ticks all the boxes.

The fusion of hardness, strength, toughness and stiffness not commonly seen in any other timber flooring products, combined with warm colours makes Hickory Impressions flooring a must choice for any home or office.

Hickory Impressions Classique has the strength over any other species.

So when the choice of flooring is hard, the decision is easy with Hickory Impressions Classique 'Hardened By Nature'.

Janka Hardness Rating


Janka Ratina

Rank

Timber Species

Timber opeoies	ourika reacing	
Brazillian Walnut Ipe	16	
Red Iron Bark, Grey Iron Bark	12-15	
Jarrah, Blackbutt, Sydney Blue Gum, Hickory , Spotted Gum	8-11	3
Tasmanian Oak, Australian Beech, European Oak	5.5-7.5	
Pine	2.9	(5)




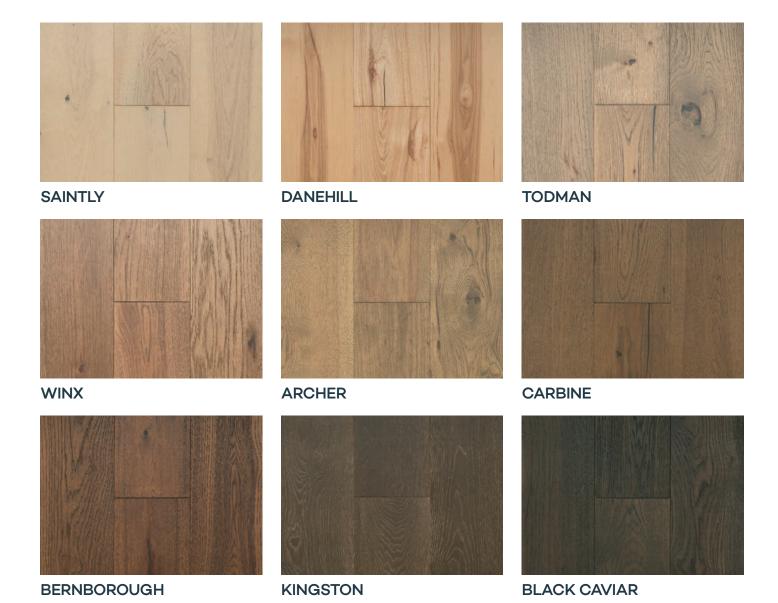

1900 x 190 x 12mm UV Lacquer | Wire Brushed | Matte Finish



Hickory Flooring Accessories



Select Underlay 2 and 3mm

Available in 2mm or 3mm our EVA Acoustic Underlay offers a higher density fabrication compared to standard closed cell foam. Ensuring thermal and acoustic standards are exceeded for residential and commercial applications.





Square Edge Stair Nosings

Hickory Impressions stair nosing allows you to continue your floor scheme where there are stairs. Colours are available for the entire range.

- · Architecturally designed
- Manufactured from pre-finished engineered timber
- 1900mm x 90mm x 12mm
- Colours to match floor boards



Solid Timber Scotia

Finish the edge of your Hickory Impressions floor with our premium designed solid scotia. Colours are available for the entire range.

- Manufactured from solid timber
- 1900mm x 18mm x 18mm
- · Colours to match floor boards



Care & Maintenance

Australian Select Timbers® brings you stylish, sustainable, sophisticated and simply beautiful floors but taking care of them to preserve their magnificent finish and quality presence is a must. By following a few simple care and maintenance guidelines your floor will continue to be a thing of beauty for years to come.

Preventative Maintenance

- Installing good quality mats inside and outside of external doors to trap grit and remove moisture from shoes is a sensible precaution and will reduce the possibility of scratches.
- In high traffic areas or areas where spillage may occur the use of mats is recommended to give added protection
- All furniture should have felt pads fitted to the base of legs or on other areas in contact with the floor to avoid scratches. On heavy furniture felt backed castors can be used if required.
- Avoid using wheeled chairs i.e. office furniture or ensure that a large good quality office mat is used to prevent indentations in the timber.
- Rubber based items e.g. the backing for matting, castors under furniture and rubber tipped furniture feet should not be in direct contact with the floor.
- Keep pet's nails trimmed to protect the floor from scratches.
- All timber reacts when exposed to direct sunlight and this may cause colour changes or fading. Curtains, blinds or UV resistant films on windows should be considered to reduce the exposure to direct sunlight and protect the flooring. Furniture and rugs should be moved occasionally so that the effect of sunlight on the floor is uniform.
- Any materials spilt on the floor should be wiped up immediately.
- Maintaining the temperature and humidity within a reasonably consistent range will keep the floor stable.

Australian Select Timbers® has a Lifetime Structural Warranty, 20 Year Residential & 5 Year Commercial Wear Warranty. For details, please refer to our website www.hickoryfloors.com.au

Cleaning

 Dry cleaning of the floor should be carried out regularly to remove loose dirt, grit and dust. Use a Bona Dusting pad or soft broom.
 If vacuum cleaning, the cleaning head must have a soft brush so as to not damage the floor.

 Use a Bona Spray Mop with Bona Wood Floor Cleaner to clean the floor surface when required; dry clean the floor first. Do not 'wet' mop the floor anytime as excessive amounts of water may cause damage.

Avoid the following:

- Indentation from stilettos or spiked heels.
- Pulling or pushing furniture or other objects across the floor.
- Avoid using a steam mop, abrasive cleaning materials or harsh detergents / household cleaners on the floor. Using these cleaning methods / materials will harm the surface of the floor and may cause physical damage to the boards.
- Do not use solvents of any kind to clean the floor. Methylated Spirits, Turpentine or similar materials will damage the floor surface.



Australian Select Timbers®







Hardened by Nature.

www.hickoryfloos.com.au