



loft_{by} Signature






Ardon Oak 24933



Avri Oak 24219



Fogo Oak 24244

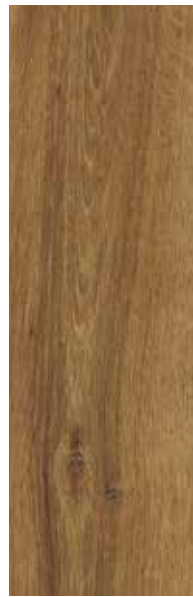

Scrivia Oak 24820



Huxley Oak 24867



Benin Oak 24572



Zain Oak 24890



Opazo Oak 24983



Technical Specifications

	STICK	TAC
Total Thickness	2.50mm	4.50mm
Wear Layer	0.55mm	0.55mm
Wear Layer Treatment	Superguard™	Superguard™
Total Weight	4.059 g/m ²	7.575 g/m ²
Plank Size	196mm x 1320mm	196mm x 1320mm
Planks per Box	14 pcs/box (3.62m ²)	7 pcs/box (1.81m ²)
Fire Rating	Bfl-s1	Bfl-s1
Slip Resistance	R10	R10
Warranty	20 Year Residential 10 Year Commercial	20 Year Residential 10 Year Commercial
Installation Method	Stick (use rec. adhesive)	Tac (use rec. adhesive)
Post Industrial Content	35%	35%



** floor prep may be required*



** floor prep may be required*



tel 613 9401 0888
fax 613 9401 0866
signaturefloors.com.au